




ELEVATION

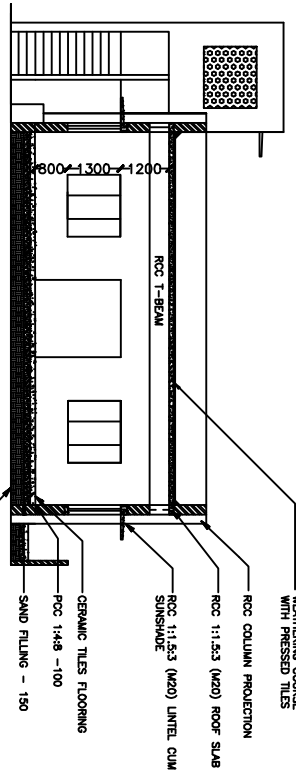

SECTION 'A-A'



SECTION 'BB' (PLINTH PROTECTION PLATFORM)

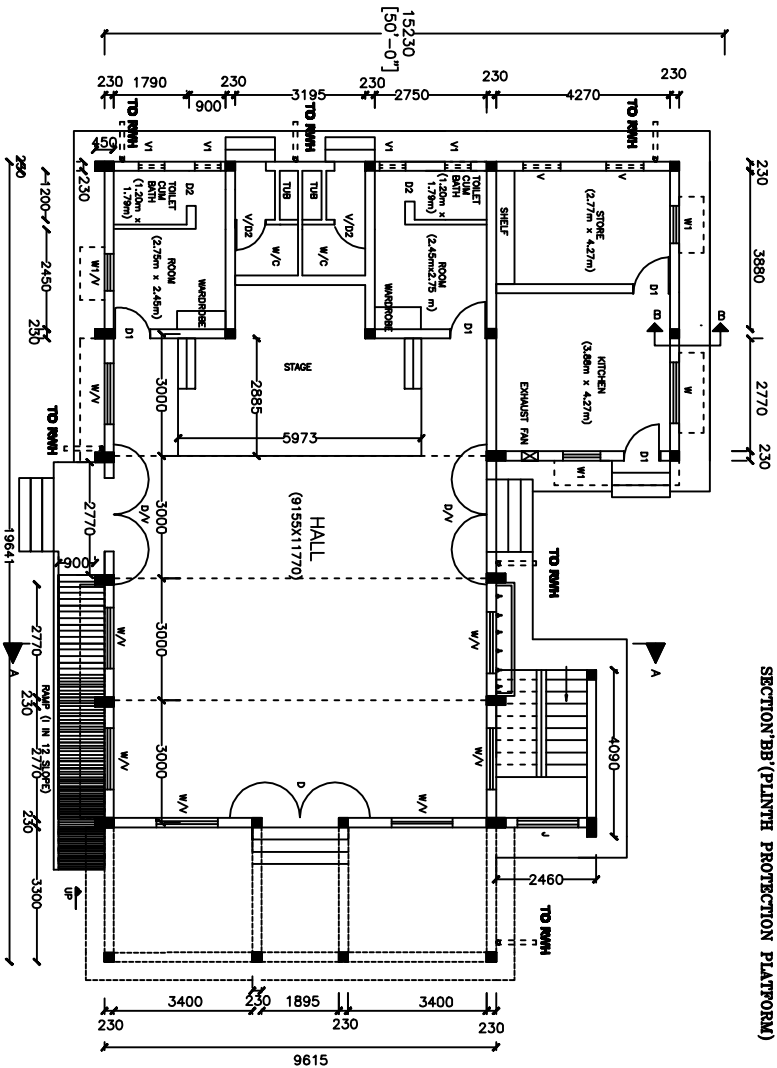

PLAN

IMPORTANT NOTES:

1. ECONOMIC FOUNDATION MAY BE ADOPTED. DEPTH OF FOUNDATION SHOULD BE BASED ON THE SOIL CONDITION AT SITE.
2. FLOOR FINISHING SHOULD BE DONE USING CERAMIC TILES
3. SILL SLAB(75mm THICK) SHOULD BE PROVIDED AT THE BOTTOM OF ALL WINDOW OPENINGS WITH 250 mm EXTENSION ON EITHER SIDE.
4. PLINTH PROTECTION PLATFORM(750mm WIDE) SHOULD BE PROVIDED AROUND THE BUILDING
5. SLIGHT SLOPE SHOULD BE GIVEN FOR ROOF SLAB
6. WEATHERING COURSE SHOULD BE PROVIDED WITH REQUIRED SLOPE TO DRAIN RAIN WATER.
7. RWH STRUCTURE SHOULD BE CONSTRUCTED AWAY FROM SEPTIC TANK(IF ANY) AND IT CAN BE LINKED TO A NEAR BY WATER SOURCE.
8. 110 mm OD PVC PIPES MAY BE USED FOR RAINWATER DOWNFALL PIPES

PLINTH AREA : 222.35 sq.m / 2392.5 SQ.FT

SCHEDULE OF JOINERY

Sl. NO.	TYPE	SIZE		SILL	TOP	DESCRIPTION	REMARKS
		WIDTH	HEIGHT				
1	D	1800	2100	-	2100	STEEL DOOR WITH 18 GMS SHEET SHUTTER	TWO LEAVES
2	D1	900	2100	-	2100	STEEL DOOR WITH 18 GMS SHEET SHUTTER	SINGLE LEAF
3	D2	750	2100	-	2100	PVC DOOR	SINGLE LEAF
4	W	1900	1300	800	2100	STEEL WINDOW WITH GLAZED SHUTTER & 12MM SQ. M.S. BARS	THREE LEAVES
5	W1	900	1300	800	2100	STEEL WINDOW WITH GLAZED SHUTTER & 12MM SQ. M.S. BARS	TWO LEAVES
6	V	800	480	2800	3300	STEEL GLAZED VENTILATOR WITH 12MM SQ. M.S. BARS	N-TYPE
7	V1	800	480	1800	2100	STEEL GLAZED VENTILATOR WITH 12MM SQ. M.S. BARS	N-TYPE
8	J	1500	1300	2200	3500	RCC JOINTLY	FIXED

DRAWING NO:1-J12/SEPD/D1.03.09.11

DIRECTORATE OF RURAL DEVELOPMENT AND PANCHAYAT RAJ

SCALE 1:100 DATA: ALL DIMENSIONS ARE IN MM

JOB NO:12 DRAWING NO: 1

AE AEE EE SE

COMMUNITY HALL - TYPE DESIGN NO:2 PLAN, ELEVATION AND SECTION