



ELEVATION

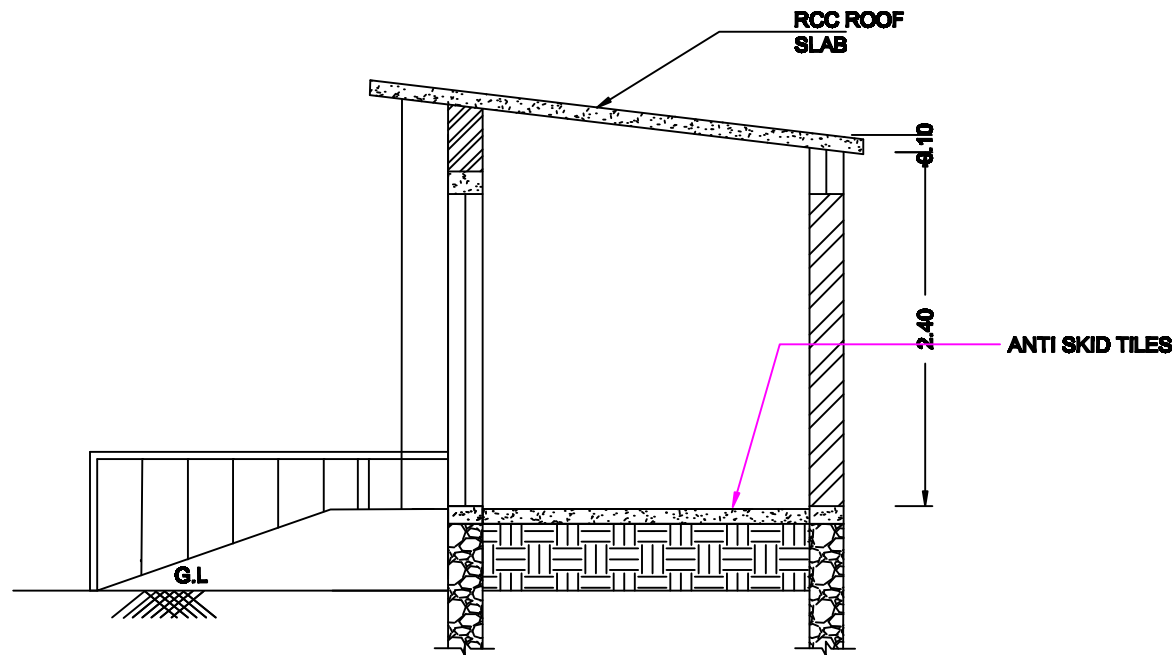

SECTION A-A

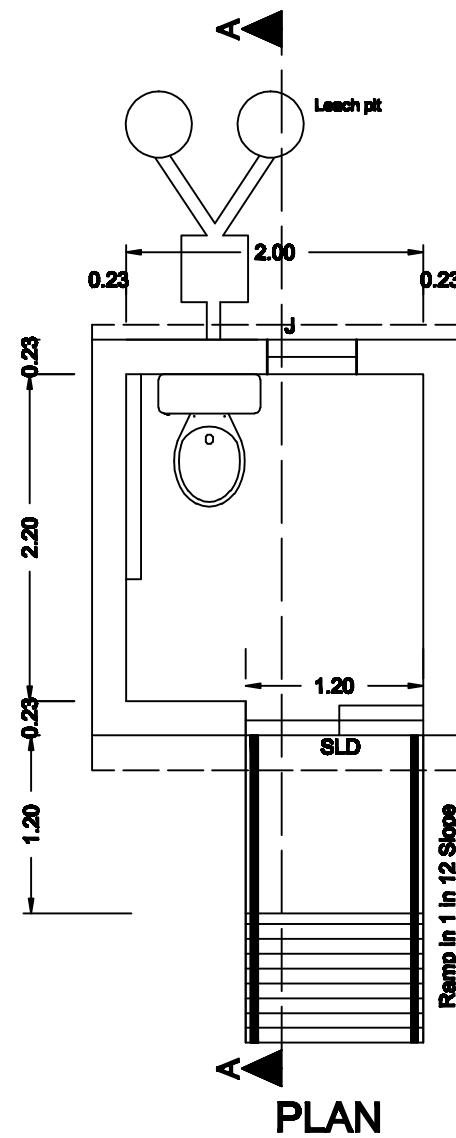

PLAN

LEGENDS:

SD	Sliding Door	1.20m x 2.10m
J	Jolly	0.60m - 0.45m

IMPORTANT NOTES

1. THE FLOORING SHOULD BE OF ANTI SKID NATURE TO AVOID SLIPPING
2. THE FLOORING MATERIAL SHOULD BE A CONTINUOUS SURFACE WITH MINIMUM SEALED JOINTS TO PREVENT ACCUMULATION OF DIRT.
3. SHARP CORNERS HAVE TO BE AVOIDED. OUT SIDE CORNERS HAVE TO BE CHAMFERED OR ROUNDED.
4. DUEL FLUSHING MECHANISM HAS TO BE PROVIDED FOR WATER CLOSET.
5. FLOOR DROP SHOULD NOT BE MORE THAN 6MM IN CASE OF TOILET FOR CHILDREN WITH SPECIAL NEEDS.
6. TOILET BASEMENT, SEPTIC TANK, LEACH PITS OR SOAK PITS MUST BE PROVIDED AS PER THE SOIL CONDITION OF THE PROPOSED SITE.
7. THE RAMP FLOOR OF THE TOILET FOR CHILDREN WITH SPECIAL NEEDS SHOULD BE ANTI SLIPPERY.

**TYPE-7
MINI COMMUNITY SANITARY COMPLEX FOR
CHILDREN WITH SPECIAL NEEDS**